





D800-42 Hammer-head Tower Crane

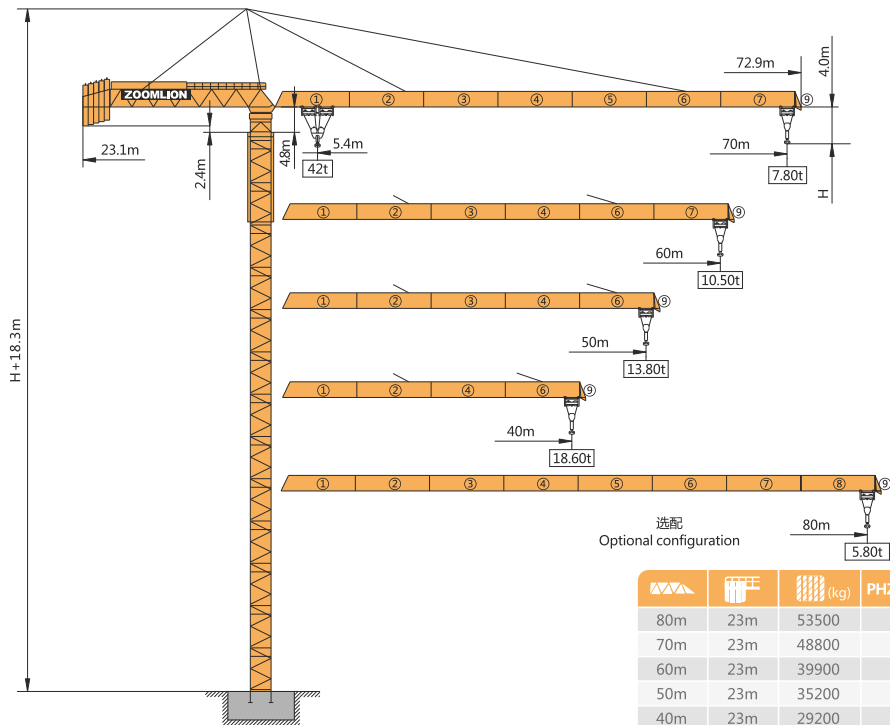


选配
Optional configuration

		 (kg)	PHZ10700	PHZ7800	PHZ6000
80m	23m	53500	5	0	0
70m	23m	48800	4	0	1
60m	23m	39900	3	1	0
50m	23m	35200	2	1	1
40m	23m	29200	2	1	0

D800-42


Masts / Reactions

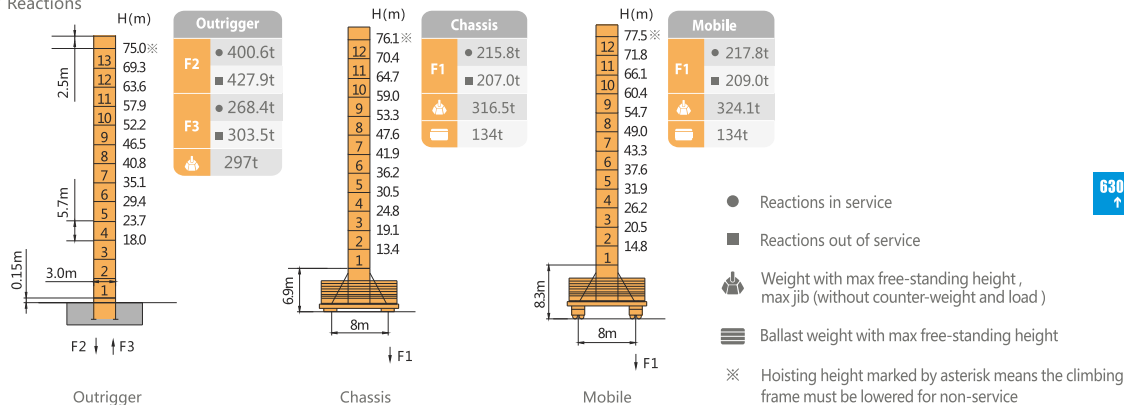

630t-m
↑

D800-42



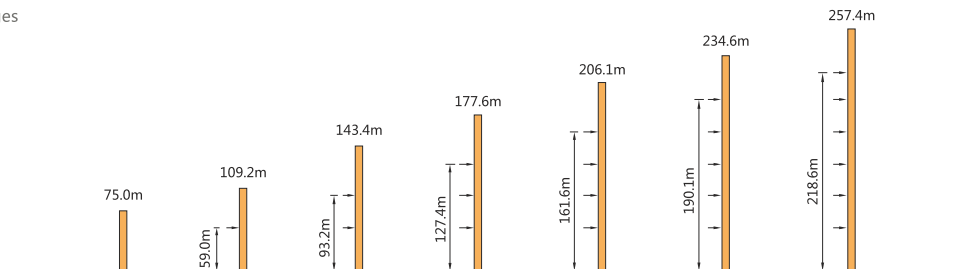








Anchorage



D800-42 Hammer-head Tower Crane

D800-42

Load Diagrams

 R(m)		Max Capacity m/t	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80 (R=82.9)		5.4~29.6/21.00	21.00			20.70	17.20	14.60	12.60	11.00	9.73	8.67	7.78	7.03	6.37	5.80
		5.4~15.9/42.00	42.00	31.40	23.50	18.50	15.00	12.40	10.40	8.85	7.57	6.52	5.63	4.87	4.21	3.64
70 (R=72.9)		5.4~31.8/21.00	21.00				18.70	16.00	13.80	12.10	10.70	9.58	8.62	7.80		
		5.4~17.0/42.00	42.00	34.30	25.80	20.40	16.60	13.80	11.60	9.95	8.57	7.42	6.46	5.64		
60 (R=62.9)		5.4~34.1/21.00	21.00				20.40	17.40	15.00	13.20	11.70	10.50				
		5.4~18.1/42.00	42.00	37.20	28.10	22.30	18.20	15.20	12.90	11.10	9.57	8.34				
50 (R=52.9)		5.4~35.3/21.00	21.0					18.10	15.70	13.80						
		5.4~18.7/42.00	42.00	38.80	29.40	22.30	19.10	15.90	13.50	11.60						
40 (R=42.9)		5.4~36.1/21.00	21.00					18.60								
		5.4~19.1/42.00	42.00	39.90	30.20	24.00	19.60	16.40								

D800-42

Mechanisms






	Configuration								kW	
			III	IV	V	III	IV	V		
 Hoisting	QPL4272	m/min	28.8	57.6	72.0	14.4	28.8	36.0	132	1050m \varnothing (8 layers)
		t	21.0	10.5	4.0	42.0	21.0	8.0		
 Slewing	HVV145B1.130C \times 2 HVV145B2.130C \times 2	r/min	0-0.6						4 \times 145 N.m	 Consult us If overtop
 Trolleying	BP185	m/min	0-50.0						18.5	
 Travelling	ZAK52-B \times 2 ZBK52-B \times 2	m/min	25/12.5						4 \times 5.2	
	380V(\pm 10%)50Hz		180.5+4 \times 5.2 (kW)							







630t-m
↑

D800-42 Hammer-head Tower Crane

D800-42

Packing List

NO	Description	Sketch	L(m)	B(m)	H(m)	Weight Per piece(t)	Qty
1	Jib I		10.31	2.22	2.46	3.37	1
2	Jib II		10.32	1.90	2.35	3.22	1
3	Jib III		10.32	1.90	2.33	2.58	1
4	Jib IV		10.32	1.90	2.31	2.67	1
5	Jib V		10.32	1.90	2.31	2.63	1
6	Jib VI		10.32	1.90	2.33	2.65	1
7	Jib VII		10.31	1.90	2.33	1.79	1
8	Jib VIII		10.31	1.90	2.30	1.53	1

NO	Description	Sketch	L(m)	B(m)	H(m)	Weight Per piece(t)	Qty
9	Jib IX		1.10	2.15	2.72	0.424	1
10	Strut		12.20	0.35	2.09	3.36	1
11	Turntable		3.92	2.87	1.48	7.10	1
12	Slewing support		3.13	3.13	1.44	7.01	1
13	Transition section		3.81	3.01	2.80	4.63	1
14	Trolley		2.47	2.28	1.31	1.0	1
						0.82	1

NO	Description	Sketch	L(m)	B(m)	H(m)	Weight Per piece(t)	Qty
15	The front section of counter-jib		11.90	2.17	2.46	6.81	1
16	The back section of counter-jib		11.90	2.00	2.46	5.79	1
17	Yoke		2.65	1.91	1.31	1.0	1
18	Cabin		2.31	1.58	2.20	0.80	1
19	Climbing frame/ Main chord		11.95	0.52	0.55	1.16	4
20	Tower Section Main chord		6.22	0.46	0.40	0.99	10x4
20	Base Tower Section Main chord		6.22	0.46	0.40	1.55	3x4

NO	Description	Sketch	L(m)	B(m)	H(m)	Weight Per piece(t)	Qty
21	Whole -Beam of Under Carriage		11.97	1.14	1.46	5.05	1
21	Strut of Under Carriage		6.44	0.34	0.51	1.51	4
22	Main-Beam of Under Carriage		6.22	0.46	0.40	8.11	4
23	Hoisting Mechanism		3.58	2.57	1.77	8.65	1
24	Trolley Mechanism		2.22	0.98	1.00	1.46	1
25	Driving Dolly		2.02	0.88	1.32	1.81	2
			2.02	0.88	1.32	1.98	2

630t-m
↑